DH-IPC-FSE8601-IVC

6M Full HD Vandal-proof IR Network Fisheye Camera

Features

- 1/1.8" 6Megapixel progressive scan CMOS
- H.264 &MJPEG dual -stream encoding
- Max 25/30fps@ 6.0M(3072x2048)
- Multiple De-wrap Mode: Original ,Panoramic , Double Panoramic ,1+3,E ptz,4 pictures
- DWDR, Day/Night(ICR), 3DNR, ROI ,AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max.IR LEDs Length 10m
- 1/1 Audio in/out (Built in Mic)
- Micro SD memery,IP6 7,IK10,PoE

DH-IPC-FSE8601-IVC

Technical Specifications

Model		IPC-FSE8600-IVC
Camera		
Image Sensor		1/1.8" 6Megapixel progressive scan CMOS
Effective Pixels		3072(H)x2048(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3 (4)~1/10000
Min. Illumination		0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
S/N Ratio		More than 5 0dB
Video Output		N/A
Came ra Features		
Max. IR LEDs Length		10m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		BLC/ HLC / DWDR
White Balance		Auto/Manual
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		1.55mm
Max Aperture		F2.0
Focus Control		Manual
Angle of View		185°/185°/185°
Lens Type		Manual
Mount Type		Board-in Type
Video		
Compression		H.264H/ H.264/ MJPEG/JPEG
Resolution		6M(3072×2048)/3M(2048×1536)/ 1080P(1920×1080)
Frame Rate	Main Stream	6M/(1 ~ 25/30fps)
	Sub Stre am	D1/CIF(1 ~ 25/30fps)
Bit Rate		40Kbps~8192Kbps
De-wrap Mode		Orig inal ,Panoramic, Double Panoramic,1+3,E ptz,4 pictures
Audio		
Compression		G.711a/G.711u/PCM
Interface		1/1 channel In/Out (Built in Mic)
Network		
Ethernet		RJ-45 (10 0/100 0Base-T)
Wi-Fi		N/A
Protocol		HTTP,TCP,ARP,RTSP,RTP,UDP,RTCP,SMTP,FTP,DHCP,DNS,DDNS,PPPOE, IPv4/v6,SNMP,QoS,UPnP,NTP
Compatibility		ONVIF P SIA CGI
Max. User Access		20users

DH-IPC-FSE8601-IVC

Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD , up to 64G B
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3at)
Power Consumption	<11W
Working Environment	-30℃~+60℃, Less than 95%RH
Ingress Protection	IP67
Vandal Resistance	IK10
Dimensions	Φ150mm x 50.7mm
Weight	0.58kg(0.86kg with packaging)

DH-IPC-FSE8601-IVC

Dimensions (mm)

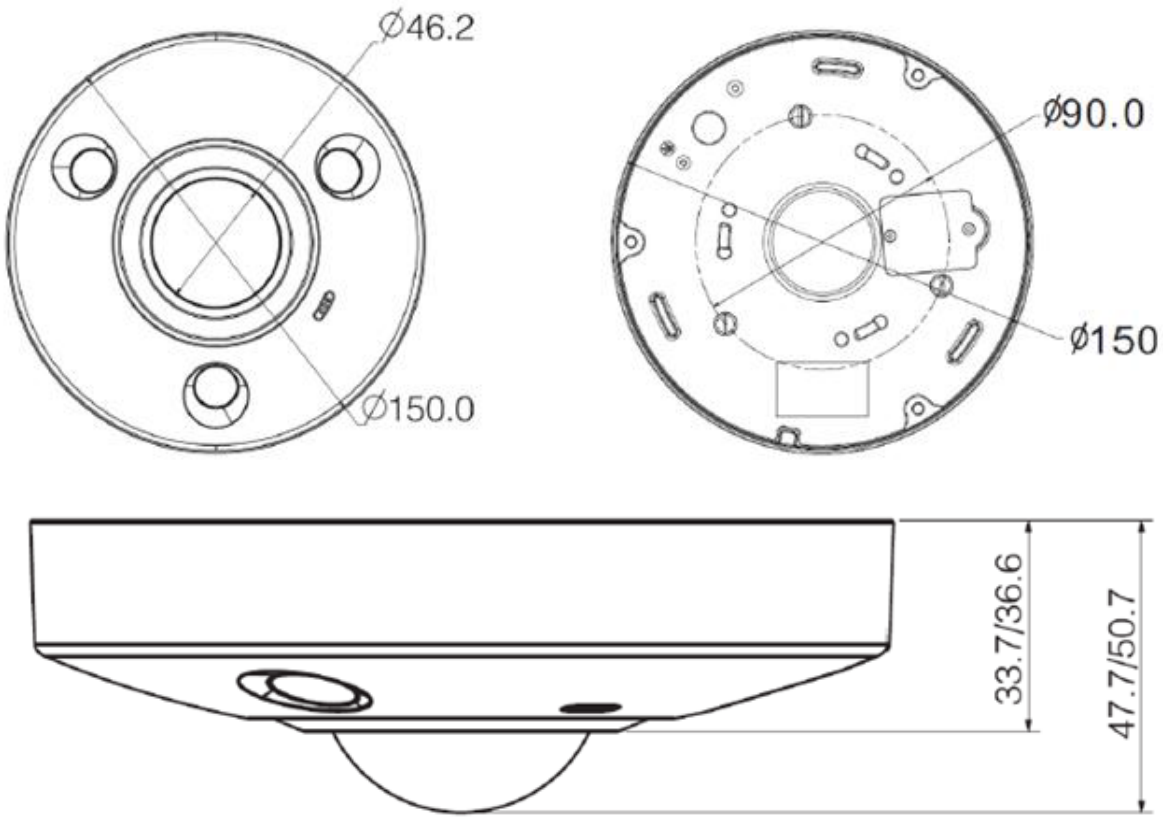

Accessories （optional ）

PFA100	PFB302S	PFA132	PFA152	PFA151

DH-IPC-FSE8601-IVC

Dahua Technology Co., Ltd.
1199 BinAn Road, Binjiang District, Hangzhou, China
Tel: +86 -571-87688883
Fax: +86 -571-87688815
Email:overseas@dahuatech.com
www.dahuatech.com

*Design and specifications are subject to change without notice.

© 20 14 Dahua Technolo gy Co., Ltd.